



MONITORING AND CONTROLLING OF POWER LOSS IN A TRANSFORMER

Ms.R.SRILEKHA,

*M.E(POWER SYSTEM ENGINEERING)/II YEAR,
PRIYADARSHINI ENGINEERING COLLEGE,VANIYAMBADI.*

Mrs.R.RAJESWARI,M.Tech,(Ph.D)

*ASSOCIATE PROFESSOR,
PRIYADARSHINI ENGINEERING COLLEGE, VANIYAMBADI.*

ABSTRACT:- Large power transformers belong to the most valuable and important assets in electrical power systems. The ageing of the used oil/paper-insulation primarily depends on the hot-spot temperature of the solid insulation system. Hence it is the dominant factor limiting the lifetime of the transformer. Therefore a prototype of a stand alone thermal monitoring system was developed and installed on a 350 MVA transformer to observe the hot-spot temperature. The experiences of successfully operation during the last years encouraged us to update the system to the newest stage. The paper describes the state-of-the-art of the thermal transformer monitoring system based on new field bus technology The advantages of a networked system and the usage of a centrally managed data base shared between multiple monitoring systems are exposed. The intention to implement new features exceeding the conventional monitoring system philosophy is discussed on an intelligent multifunction criteria Fuzzy algorithm for the control of fans of the heat exchanger units. It permits a more cost-effective long-time transformer operation management.

Key words – Power Transformer, Thermal monitoring, Hot-spot temperature, Paper/Oil-insulation ageing, Overload capability, Fuzzy controlled fan operation, Field bus technology

1 INTRODUCTION

Since large power transformers belong to the most valuable assets in electrical power networks it is suitable to pay higher attention to this operating resources. An outage impacts the stability of the network and the associated financial penalties for the power utilities can be considerably high. Nevertheless the possible damage caused to the environment in case of a burst can not be denied. The statistical data show that the windings represent a not neglect able source of transformer faults therefore thermal stress is the most provocative factor until cellulose insulation is used [1].

Thermal impact leads not only to a long term oil/paper-insulation degradation it is also a limiting factor for the transformer operation [2]. Therefore the knowledge of the temperature, especially the hot-spot-temperature, is of high interest. The on-line information about the current operation condition and the calculation of current thermal stress help to avoid unexpected outages. Furthermore it allows a more efficient and profitable transformer exploitation which becomes under the competitive conditions of the liberalized energy market more and more important [3].

Thermal monitoring systems have been established due to easy temperature measurement techniques and for most applications sufficient knowledge in thermal modelling, e.g. hot-spot temperature calculation accuracy. The benefit gathered by thermal monitoring is indisputable, ranging from the instantaneous operation state up to a long-term operation strategy anyhow with high flexibility for rapid intervention if “non-normal” operation conditions will occur, e.g. for overload and emergency operation purpose. The sophisticated technology now a days allows to combine features exceeding the conventional monitoring pilosophy, e.g. monitoring and control facilities which enables feedback between the monitoring system and other subassembly.

2 THERMAL MODELLING AND ON-LINE MONITORING

2.1 THERMAL TRANSFORMER MODEL

The determination of the temperature of the winding’s insulation hot-spot represents a very complex task. The direct measurement using fiber-optic techniques is still of no practical use. The prevalent method is by establishing a thermal model

of the transformer. Due to the complexity of the heat transfer phenomena there is no exact thermal model. A number of papers have been published proposing improvements of the thermal model from the valid IEC standard. The standard approach for hot-spot temperature calculation is through using characteristic point temperatures. Assimilable models are published in [4], [5] and [6].

The model from [5] is of special interest since it is given in the latest IEEE guide [7] as alternative temperature calculation method. A new attempt was made in [4] where a thermal model with parameters which can be in a great extend determined based on easy measurements is given.

The value of the maximum hot-spot temperature has to be taken in accordance to IEC 354, preferable not exceeding 140°C in order to avoid decomposition of the transformer oil usually used.

It shows that the ageing rate reduplicates with every temperature rise of 6 K. Based on this equation the total loss of lifetime can be determined and for long term operation strategy this quantity can be hold under a desired value.

2.2 COOLING SYSTEM AND FUZZY LOGIC ALGORITHM FOR FAN CONTROL

Since the cooling system is responsible for transferring the heat generated inside the active parts of the transformer to the ambient cooling medium its influence on the thermal behavior of the entire system is obvious. The finer the cooling system capacity can be aligned to the required value the more profitable and intelligent intervention strategy can be applied. On our transformer each of the cooling unit is equipped with a fan which can operate in different modes of revolution (switched off, 360 1/min and 725 1/min). This allows a sufficient variety of different adjustable cooling capacities and thus a worthwhile application of an intelligent fan control.

The control algorithm takes the following aspects into consideration:

- Constant top-oil temperature, which reduces breathing of the transformer and less moisture absorption of the transformer oil.
- Overload capability, which can be increased by pre-cooling of the transformer oil.
- Thermal ageing analysis.
- Total loss optimization (consideration of transformer losses and losses of the heat exchangers, e.g. fans).

For the development of a suitable Fuzzy control algorithm it is necessary to establish a model of the transformer and the cooling system. Figure 1 shows the MATLAB-SIMULINK model of the total system (transformer with heat exchanger units).

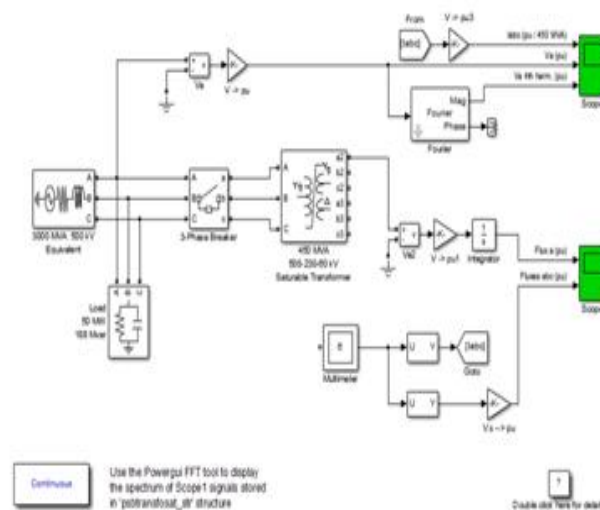


Figure 1: MATLAB-SIMULINK model to establish the fuzzy control algorithm.

A input data for the model shown in Figure 1 only the load factor, the tap changer position and the ambient temperature is required. For the simulation these values are taken from the historical data base available since 1996. The thermal model is introduced using a MATLAB function block.

Within this function block most of the input parameters for the Fuzzy controller are calculated. The output quantity of the Fuzzy control block is the number of fans of a certain revolution have to be switched on or have to be switched off.

The output value is determined by the Fuzzy control algorithm established with the applied Fuzzy rules and the choice of adequate membership functions. With an additional control logic block the new status of all fans is appointed.

3. CONCEPT OF THE SYSTEM

3.1 HARDWARE CONCEPT


In order to meet the main requirements of a monitoring system such as long time applicability with high reliability commercial available components are preferred [10]. Moreover a modular technology based arrangement guarantees the expandability and in case of faults a fast exchangeability of defective parts. This accounts for a minimum of maintenance costs. Another advantage of a modular design is an easy and most cost effective adaptation to the customers needs and to the technical requirements of the transformer to monitor [11].

Through those bus terminals totally 20 temperatures are measured: on the transformer side 3 top-oil temperatures, on each of the four heat exchanger units the temperature of the entering and sluicing oil as well as the entering and leaving cooling medium temperatures and additionally the ambient temperature.

For the acquisition of the states of oil pumps 4 digital input channels are installed. Further 8 digital input channels are used to collect the state of the four fans of the cooling units. Each of the fan can run in two different revolution modes.

For the later implementation of the intelligent fan control without any further hardware modification anticipatory 8 digital output terminals have been installed. Later they will be used to activate the fans according to the result of the FUZZY - control algorithm result. The bus terminals are directly connected to a MODBUS bus coupler with integrated controller.

All preliminarily described components are placed in a enclosure near the transformer as shown in Figure 3.

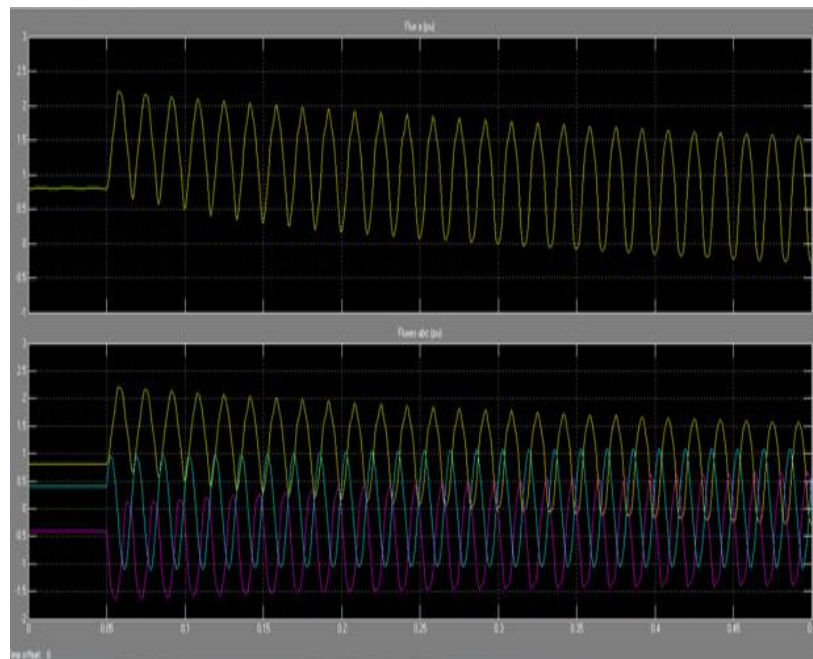

To prevent the hardware from extreme climatic conditions the enclosure is equipped with a heating and a fan inside. The data acquisition system is connected with a computer via a standard serial RS 485 interface connection using MODBUS protocol.

The computer is one of the most delicate hardware component in the system. Therefore it is located in the control room in order to avoid the tough operating conditions nearby the transformer. Data processing and archiving are the main duties. Local visualization of the data is possible but deteriorate due to the remote accessibility through a fast ISDN connection. This makes possible to administrate the system, visualize the data and to download the entire data base or only desired parts of it from any far control centre. This feature is very important since most of the substations nowadays operate without local staff.

To protect the computer from power supply breakdowns an uninterruptible power system (UPS) is installed. This guarantees that in case of a power outage after a certain time the computer is shut down regularly. Thus a damage of the database is almost impossible.

3.2 SOFTWARE CONCEPT

The basic requirement for a monitoring software is the ability to work under all popular operating systems, nowadays preferably Microsoft Windows. The flexibility concerning expanding with additional monitoring systems is fundamental. Data archiving and data visualization is taken for granted. To meet these requirements the used software is divided into two main parts. The first part includes the main configuration facility and is also responsible for reading the data from the data acquisition units (for example the field bus coupler) and filing them in a common database. Other monitoring systems can be attached easily since several standard interface modules are provided. Other software modules and applications have access to the data base through API, ODBC and SQL standards so that full data transparency is achieved. Additional features are the possibility of defining virtual channels and introducing supplementary sub-programs for additional calculation purposes, e.g. for hot-spot temperature calculation. As a matter of course remote connectivity via accustomed modem or ISDN is supported.

The other part of the software provides multifarious options for on-line or historical data visualization. Beneath multiple pre-defined visualization settings also user defined presentations can be introduced and data exportation, for example into ASCII format, is offered. The visualization can be done on the local machine (server) and on clients accessing the server by remote. From time to time backups from the data base have to be made so as to assure that no data loss happens at least over the service time of the transformer concerned. Beyond this the historical data are of use for other comparable transformers not having available historical monitoring data, that means experience in long term transformer operation can be gained and applied on other similar transformers.

4. CONCLUSIONS

It was shown that due to the increased exploitation of power transformers in consequence of the liberalized energy market thermal on-line monitoring became very popular during the last years. The high amount of transformers operating near the predicted end of lifetime speeds up this tendency. Based on former experiences with the existing thermal monitoring system the presented concept was designed and installed on a 350 MVA transformer in service. The use of field bus technology showed that the wiring effort has been reduced considerably. This holds for a retrofitting on existing transformers. The availability of a huge number of input and output bus terminals has shown in practice that new applications can be realized easily without disturbing the integrity of the system by introducing separate hardware modules. Standardized interfaces allow unproblematic connection to the monitoring server. Sophisticated software techniques provide high flexibility concerning data processing, archiving, visualization and user defined extensions. A modern central database system allows to collect important monitoring data from several systems installed. This issue simplifies the correlation process of data attained by different monitoring systems. One task is to calculate the hot-spot temperature continuously. The overload capability of the transformer in every minute can also be determined.

5. REFERENCES

- [1] B. K. Bose, "Global energy scenario and impact of power electronics in 21st century," *IEEE Trans. Ind. Electron.*, vol. 60, no. 7, pp. 2638–2651, Jul. 2014.
- [2] S. Yantao and W. Bingsen, "Evaluation methodology and control strategies for improving reliability of HEV power electronic system," *IEEE Trans. Veh. Technol.*, vol. 63, no. 8, pp. 3661–3676, Oct. 2015.
- [3] P. Pisek, B. Stumberger, T. Marcic, and P. Virtic, "Design analysis and for HEV," *IEEE Trans. Magn.*, vol. 49, no. 1, pp. 152–155, Jan. 2013.
- [4] K. Kiyota, T. Kakishima, and A. Chiba, "Comparison of test result and design stage prediction of switched reluctance motor competitive with 60-kW rare-earth PM motor," *IEEE Trans. Ind. Electron.*, vol. 61, no. 10, pp. 5712–5721, Oct. 2016.
- [5] H. Jinseok, L. Heekwang, and N. Kwanghee, "Charging method for the secondary battery in dual-inverter drive systems for electric vehicles," *IEEE Trans. Power Electron.*, vol. 30, no. 2, pp. 909–921, Feb. 2015.
- [6] Y. Hu, X. Song, W. Cao, and B. Ji, "New SR drive with integrated charging capacity for plug-in hybrid electric vehicles (PHEVs)," *IEEE Trans. Ind. Electron.*, vol. 61, no. 10, pp. 5722–5731, Oct. 2014.
- [7] I. Boldea, L. N. Tutelea, L. Parsa, and D. Dorrell, "Automotive electric propulsion systems with reduced or no permanent magnets: an overview," *IEEE Trans. Ind. Electron.*, vol. 61, no. 10, pp. 5696–5711, Oct. 2014.
- [8] D. H. Lee, T. H. Pham, and J. W. Ahn, "Design and operation characteristics of four-two pole high-speed SRM for torque ripple reduction," *IEEE Trans. Ind. Electron.*, vol. 60, no. 9, pp. 3637–3643, Sep. 2013.
- [9] L. Shen, J. Wu, and S. Yang, "Initial position estimation in SRM using bootstrap circuit without predefined inductance parameters," *IEEE Trans. Power Electron.*, vol. 26, no. 9, pp. 2449–2456, Sep. 2012.
- [10] J. Liang, D. H. Lee, G. Xu, and J. W. Ahn, "Analysis of passive boost power converter for three-phase SR drive," *IEEE Trans. Ind.*